



BEST AVAILABLE COPY

EP04/50 775



PCT/EP200 4 / 0 5 0 7 7 0



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8Q

REC'D 20 JUL 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 25 May 2004

Patents Form 1/77


Patents Act 1977
(Rule 16)



2436107 EP24248-1 200351
P01/7700 0-05-0317248-3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

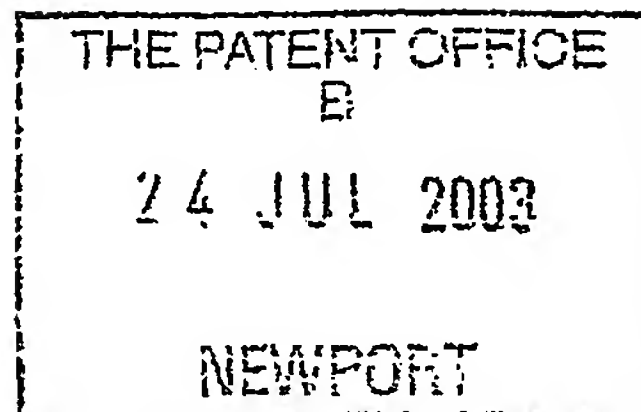

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

MG/LD/P/24202.GB

2. Patent application number

(The Patent Office will fill in this part)

0317248.3

24 JUL 2003

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

VOITH FABRICS GmbH & Co. KG,
MARKTSTRASSE 185,
72793 PFULLINGEN,
GERMANY.

Patents ADP number (*if you know it*)

8647513001

If the applicant is a corporate body, give the country/state of its incorporation

GERMANY

4. Title of the invention

FABRIC

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

WILSON GUNN M'CAW
41-51 ROYAL EXCHANGE
CROSS STREET
MANCHESTER
M2 7BD

WILSON GUNN M'CAW
5TH Floor, Blackfriars House
The Parsonage
MANCHESTER M3 2JA

07153927001

global change

22/1/04

MJ

Patents ADP number (*if you know it*)

7153927001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 09

Claim(s) 3

Abstract

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 23.07.2003.

Wilson Gwyn M'Carw

12. Name and daytime telephone number of person to contact in the United Kingdom M. GOODWIN - 0161 827 9400

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

FABRIC

The present invention relates to papermachine fabrics, and particularly but not exclusively to forming fabrics for use in the forming section of a papermaking machine.

Paper is conventionally manufactured by conveying a paper furnish, usually consisting of an initial slurry of cellulosic fibres, on a forming fabric or between two forming fabrics in a forming section, the nascent sheet then being passed through a pressing section and ultimately through a drying section of a papermaking machine. In the case of standard tissue paper machines, the paper web is transferred from the press fabric to a Yankee dryer cylinder and then creped.

Papermachine clothing is essentially employed to carry the paper web through these various stages of the papermaking machine. In the forming section the fibrous furnish is wet-laid onto a moving forming wire and water is encouraged to drain from it by means of suction boxes and foils. The paper web is then transferred to a press fabric that conveys it through the pressing section, where it usually passes through a series of pressure nips formed by rotating cylindrical press rolls. Water is squeezed from the paper web and into the press fabric as the web and fabric pass through the nip together. In the final stage, the paper web is transferred either to a Yankee dryer, in the case of tissue paper manufacture, or to a set of dryer cylinders upon which, aided by the clamping action of the dryer fabric, the majority of the remaining water is evaporated.

So called "triple layer" papermachine fabrics are known in the art. These generally comprise paper side and machine side warp and weft yarn systems, which are bound together by binder yarns.

EU 1,000,197A and EU 1,158,090A both disclose triple layer fabric in which

the paperside weave is obtained by the interweaving of paperside machine direction (MD) or warp yarns with both individual, non-interchanging, paperside weft yarns and interchanging pairs of weft yarns which, in addition to forming part of the paperside weave, also act to bind the paperside and wear side fabrics together.

5 While structures made according to EU 1,000,197A and EU 1,158,090A have given good performance, in some respects, they have been found to be rather high in thickness such that water carried within the fabric void space may, near the end of the paper machine's sheet forming section, rewet the paper sheet resulting in decreased machine efficiency. EU 1,273,698A seeks to resolve this issue by
10 incorporating thinner MD and CD (cross machine direction) yarns such that thinner fabrics containing less void space are provided. While this approach is helpful in resolving the so-called "sheet rewet" issue it creates a new problem in that the finer fabric has reduced CD bending stiffness and consequently the less stable fabric has a decreased ability to minimise sheet basis weight profiles.

15 The present invention has been made from a consideration of these problems.

 According to the present invention there is provided a papermachine fabric having a paperside warp layer and a machine side warp layer, the fabric comprising at least one set of paperside wefts interlaced with the paperside warps, at least one set of machine side wefts interlaced with the machine side warps and at least one
20 pair of interchanging weft binders, the members of each weft binder pair together forming one continuous weft path on the paperside, all of said weft binder pairs interweaving with at least one paperside warp and at least one machine side warp, wherein at least one weft binder yarn member of at least one binder pair interlaces in an unlocked position with at least one warp yarn of the machine side of the fabric.

25 An unlocked binder position under a warp yarn of the machine side or so called "wearside" fabric is one that is not enclosed on all sides by the interlacing of

wearside fabric warp and weft yarns. Conversely, when a binding weft interlaces with a warp of the wearside fabric and that binding is contiguous to the interlacings of wearside fabric warp and weft on each side then the binder knuckle position is referred to as locked because the proximity of the contiguous machine direction –
 5 cross machine direction (MD-CD) interlacings maintain, or lock, the said binder knuckle in that position such that it is not free to move during the fabric manufacturing process.

Surprisingly, it has been found in fabrics with a "regular sateen" machine side weave pattern, that a significant increase in fabric CD bending stiffness can be
 10 achieved when the binder yarns are not locked in position by the interlacing of contiguous MD and CD yarns of the wearside fabric. Thus with the fabrics of the present invention the binder position relative to the interlacings of the warp and weft yarns in the machine side fabric facilitates a significant increase in fabric bending stiffness and thus the ability of the fabric to control sheet basis weight profiles.

15 In the preferred fabric of the present invention the machine side wefts interlace with the machine side warps in a regular sateen order to enable ease of suitable binder knuckle positioning. A regular sateen weave is herein defined as a weave containing all of the following features:

- the functional surface of the fabric is dominated by weft floats;
- 20 - fabric MD-CD interlacings are spaced at regular distances from each other;
- no two MD-CD interlacings are contiguous;
- there is only one warp interlacing with each weft in the weave pattern repeat;
- all the floats of all MD yarns are of equal length;
- all the floats of all CD yarns are of equal length.

25 Regular sateen weaves are utilised as opposed to irregular, modified, or extended sateen weaves due to the ease with which binder knuckles can be

distributed. Where sateen weaves are referred to in the remainder of the application it is to be understood that the weave in question belongs to the regular category.

Preferred wear side fabric sateen weaves include 5,7,8, or 10 shaft sateens and preferred fabric total warp repeat size may include 20 or 40 shaft, 28 shaft, 16 or 32 shaft by way of non-limiting examples which allow for multiple wearside and paperside fabric weave repeats to thereby give more options regarding the placement of binder knuckles in the wearside fabric.

In a preferred embodiment of the invention all binder pairs comprise a binder yarn which interlaces with machine side warp in unlocked positions. In an alternative embodiment half of the binder pairs comprise a binder yarn which interlaces with the machine side warp in unlocked positions.

In one preferred embodiment the paper side weave pattern is selected from the group including 3,4,5,6 shaft straight or broken twill, or regular or irregular sateen or other modified weave giving a paper side weave where weft floats extend over two or more adjacent paper side warp yarns.

In an alternative embodiment the paperside weave pattern is plain weave. In this embodiment, in particular, the machine side weave pattern is ideally selected from the group including 5,7,8 and 10 shaft sateen.

In a preferred embodiment of the invention the ratio of paper side to machine side weft yarns, when counting a pair of interchanging wefts as a single paper side weft, is selected from the group including 1:1, 2:1, 3:2, 4:3, 5:3.

Ideally the ratio of paper side to machine side warp yarns is selected from the group including 1:1, 2:1, 3:2, 4:3, 5:3.

The interchanging weft binders may be positioned between and adjacent non-interchanging paperside wefts.

In one embodiment interchanging weft binders are positioned in the paperside

fabric such that all paperside weft yarns are separated by a pair of interchanging binder wefts. Alternatively interchanging weft binder pairs may be positioned such that groups of two, three or more contiguous paperside weft yarns occur between each interchanging weft binder pair and the size of the contiguous paperside weft yarn groups are identical through the full fabric weave repeat. Alternatively interchanging weft binders may be positioned such that the number of contiguous paperside weft yarns occurring between successive interchanging weft binder pairs varies between at least three successive interchanging weft binder pairs in the fabric weave repeat.

10 In a preferred embodiment interchanging binder pairs and paperside weft yarns occur in equal numbers. In a further preferred embodiment interchanging weft binder pairs are less numerous than the paperside weft yarns. In another embodiment interchanging binder pairs are more numerous than the paperside weft yarns.

15 The invention is primarily aimed at relatively fine and thin fabric with paper side warp diameter in the range of 0.10 to 0.14mm and with machine side warp diameter in the range of 0.15 to 0.19mm. However, the benefits of the invention may be realised in fabric utilising thicker warp yarns of up to, for example, 0.25mm on the paper side and up to 0.30mm on the wear side. Although yarns are described as
20 having diameter the invention can be realised with weft and/or warp yarns of non-circular cross-section such as ovate, square, or rectangular. The yarn materials may be monofilament or multifilament and can be made from such materials as polyester and polyamide. Optionally the insertion order of the interchanging weft pair can be carried out such that the yarns "reverse". Such reversing to re-distribute relative yarn
25 knuckle positions in the paperside fabric are known in the art.

In order that the present invention may be more readily understood, specific

embodiments thereof will now be described by way of illustration only with reference to the accompanying drawings in which:-

Fig.1 is a series of warp cross-sectional diagrams showing the consecutive weft paths of a fabric in accordance with the prior art EP 1,000,197A and EP 1,158,090A; and

Fig. 2 is a series of warp cross sectional diagrams showing consecutive weft paths of a first fabric in accordance with the present invention.

Referring to Fig. 1 a fabric in accordance with the prior art has a twenty warp yarn repeat wherein warp yarns 1,3,5.....19 are paperside warp yarns and warp yarns 2,4,6....20 are wearside warp yarns. The fabric of Fig. 1 also contains a forty weft repeat. The wefts comprise paper side or top wefts T1,T2,T3....T10, wear side or bottom wefts B1,B2,B3....B10 and interchanging binder weft pairs 40,42,44.....58.

Still referring to Fig. 1, interchanging weft yarns I1 and I2 are both binder yarns in the pair 40 and interlace respectively with warp yarns 14 and 4 of the wear side fabric. Both binder yarns are positioned between wear side wefts B1 and B2. The interlacing of weft B1 with warp 12 and weft B2 with warp 16 acts to "lock" binder I1 in position in the wearside fabric where it interlaces with warp 14 such that the binder knuckle will fit snugly into this area and will not move during manufacture. Similarly the interlacing of weft B1 with warp 2 and weft B2 with warp 6 acts to lock binder I2 in position. The binding arrangement of interchanging binders I1 and I2 is representative of the other binder pairs, as can be seen in Fig 1, so these are not described further. The interlacing of the respective wear side weft and warp yarns acts to form a five shaft wear side fabric with the characteristic weft path moving under four adjacent warps and over one warp arrangement, for example weft B1 moves over warp 2 and under adjacent warps 4,6,8,&10 to give a first five shaft repeat before moving over warp 12 and under adjacent warps 14,16,18,20 to give a

second five shaft repeat. All of the weft floats in the wearside fabric are of equal length, i.e. under 4 warp yarns, as indeed are the warp floats. The interlacings of warp yarns with adjacent wefts in the wear side cloth are not contiguous but instead are separated by a regular number of warp yarns, for example, weft B1 interlaces
 5 with warps 2 and 12 while the adjacent weft B2 interlaces with warps 6 and 16 such that the warps interlacing with adjacent wefts are separated by a single warp yarn i.e. the "stepping" sequence wearside fabric warp yarn knuckles always moves by 2 warp yarns when moving from one contiguous wearside weft to another. Accordingly the wear side structure is a five shaft sateen weave. On the paper side the interlacing of
 10 the warp and wefts in "over-one and under-one" arrangement identifies a so-called plain weave structure.

Referring to Fig. 2 a triple layer forming fabric in accordance with the invention has a twenty warp yarn repeat wherein warp yarns 1,3,5.....19 are paperside warp yarns and warp yarns 2,4,6....20 are wearside warp yarns. The
 15 fabric of Fig. 2 also contains a forty weft repeat. The wefts comprise paper side or top wefts T1,T2,T3....T10, wear side or bottom wefts B1,B2,B3....B10 and interchanging binder weft pairs 40A,42A,44A.....58A. In Fig. 2 interchanging yarns I1 and I2 are both binder yarns in the pair 40A and interlace respectively with warp yarns 18 and 8
 of the wear side fabric. Both binder yarns are positioned between wear side wefts B1
 20 and B2. However, unlike the prior art, the interlacing of weft B1 with the wearside warp12, and weft B2 with warp 16 does not act to "lock" binder I1 in position. Instead interchanging binder I1 remains unlocked where it binds under warp 18 because, although contiguous with interlacing of B2 and warp 16 on one side, there is no locking wearside weft-warp knuckle on the remaining side. Similarly the
 25 interlacing of weft B1 with warps 2 and weft B2 with warp 6 does not act to lock binder I2 in position. The nature of the binding arrangement of interchanging binders

l1 and l2 is representative of the other binder pairs, as can be seen in Fig 2, so these are not described further. The interlacings of the respective wear side wefts and warps act to form a five shaft wear side fabric with the characteristic weft under four adjacent warps and over one warp arrangement as has been described with reference to Fig. 1 and other features such that the wear side structure is a five shaft sateen weave. On the paper side the interlacing of the warp and wefts in "over-one and under-one" arrangement identifies a so-called plain weave structure.

In fabrics of the invention made according to Fig 2 it was found, when testing with a two-point bending stiffness tester, that such fabric had an increase in CD bending stiffness of 25% when compared to fabric made according to Fig. 1.

A high value for fabric CD bending stiffness is desirable to increase the fabric ability to minimise sheet basis weight profiles. Fabric according to Fig. 2 may allow some movement of the binder yarns such that they may ride at least partially on an adjacent wear side weft yarn, as indicated by a thickness increase of 2.4% compared to fabric according to Fig. 1, such that bending resistance increases.

The full details for the fabric according to Figs. 1 and 2 are given in Table 1.

Table 1

	Prior Art	Invention
Weave Pattern	Fig 1	Fig 2
Yarn Diameter (mm)		
Paperside MD/CD	0.12/0.13	0.12/0.13
wearside MD/CD	0.15/0.20	0.15/0.20
Binders	0.13	0.13
Yarns/cm*		
Paperside MD/CD	38.0/39.5	38.0/39.5
wearside MD/CD	38.0/19.7	38.0/19.7
Bending Stiffness Ratio	100	125
Thickness (mm)	0.700	0.718
Permeability (cfm)	358	376

*binder pairs counted as single paper side wefts

In Fig. 2 all binders are shown in "unlocked" positions. However, some benefits may be obtained from fabrics where only some binders are in the unlocked position in the wear side fabric and some binders are in a locked position on the
5 fabric wear side.

In Fig. 2 the ratio of paper side to wear side weft yarns, when counting a binder pair as equal to a single paper side weft pair, is shown as 2:1. However, fabric in accordance with the invention can also be made with an "effective" paper side to wear side CD ratio of 1:1, 3:2, 4:3, 5:3 and so forth as has been stated.

10 It is to be understood that the above described embodiment is by way of illustration only. Many modifications and variations are possible.

Claims

1. A papermachine fabric having a paperside warp layer and a machine side warp layer, the fabric comprising at least one set of paperside wefts interlaced with paperside warps, at least one set of machine side wefts interlaced with machine side warps and at least one pair of interchanging weft binders, the members of each weft binder pair together forming one continuous weft path on the paperside, all of said weft binder pairs interweaving with at least one paperside warp and at least one machine side warp, wherein at least one weft binder yarn member of at least one binder_pair interlaces in an unlocked position with at least one warp yarn of the machine side of the fabric.
2. A papermachine fabric as claimed in claim 1, wherein at least one weft binder yarn member of each binder pair interlaces with machine side warp in an unlocked position.
3. A papermachine fabric as claimed in claim 1, wherein all weft binder yarn members of all binder pairs interlace with machine side warp yarns in unlocked positions.
4. A papermachine fabric as claimed in claim 1, wherein at least one weft binder yarn member of at least 25% of the binder pairs interlaces with machine side warp in unlocked positions.
5. A papermachine fabric as claimed in any preceding claim, wherein the paper side weave pattern comprises weft floats which extend over two or more adjacent paper side warp yarns.
6. A papermachine fabric as claimed in any of claims 1 to 4, wherein the paper side weave pattern is plain weave.
7. A papermachine fabric as claimed in any preceding claim, wherein the machine side weave pattern is selected from the group including 5,7,8,10

shaft regular sateen.

8. A papermachine fabric as claimed in any preceding claim, wherein the ratio of paper side to machine side weft yarns, when counting a pair of interchanging wefts as a single paper side weft, is selected from the group including 1:1, 2:1, 3:2, 4:3, 5:3.
9. A papermachine fabric as claimed in any preceding claim, wherein the ratio of paper side to machine side warp yarns is selected from the group including 1:1, 2:1, 3:2, 4:3, 5:3.
10. A papermachine fabric as claimed in any preceding claim, wherein all non-interchanging paperside weft yarns are distributed in groups of one paperside weft and each group is separated by a pair of interchanging weft binders.
11. A papermachine fabric as claimed in any of claims 1 to 9, wherein all non-interchanging paperside weft yarns are distributed in groups of two paperside wefts and each group is separated by a pair of interchanging weft binders.
12. A papermachine fabric as claimed in any of claims 1 to 9, wherein all non-interchanging paperside weft yarns are distributed in equal sized groups of at least three paperside wefts and each group is separated by a pair of interchanging weft binders.
13. A papermachine fabric as claimed in any of claims 1 to 9, wherein non-interchanging paperside weft yarns are distributed in groups of at least two different sizes and each group is separated by a pair of interchanging weft binders.
14. A papermachine fabric as claimed in any of claims 1 to 9, wherein interchanging weft binder pairs are less numerous than the non-interchanging paperside wefts.
15. A papermachine fabric as claimed in any of claims 1 to 9, wherein

interchanging weft binders pairs are present in equal number to the non-interchanging paperside wefts.

16. A papermachine fabric as claimed in any of claims 1 to 9, wherein interchanging weft binder pairs are more numerous than the non-interchanging paperside wefts.
- 5
17. A method of making paper, said method comprising the steps of:
- i) providing a papermachine fabric according to any of the preceding claims;
 - ii) depositing paperstock on the papermaking side of said papermachine fabric;
 - 10 iii) dewatering said paperstock through said papermachine fabric.

Number of paperside knuckles made by the respective members of the interchanging yarn pair

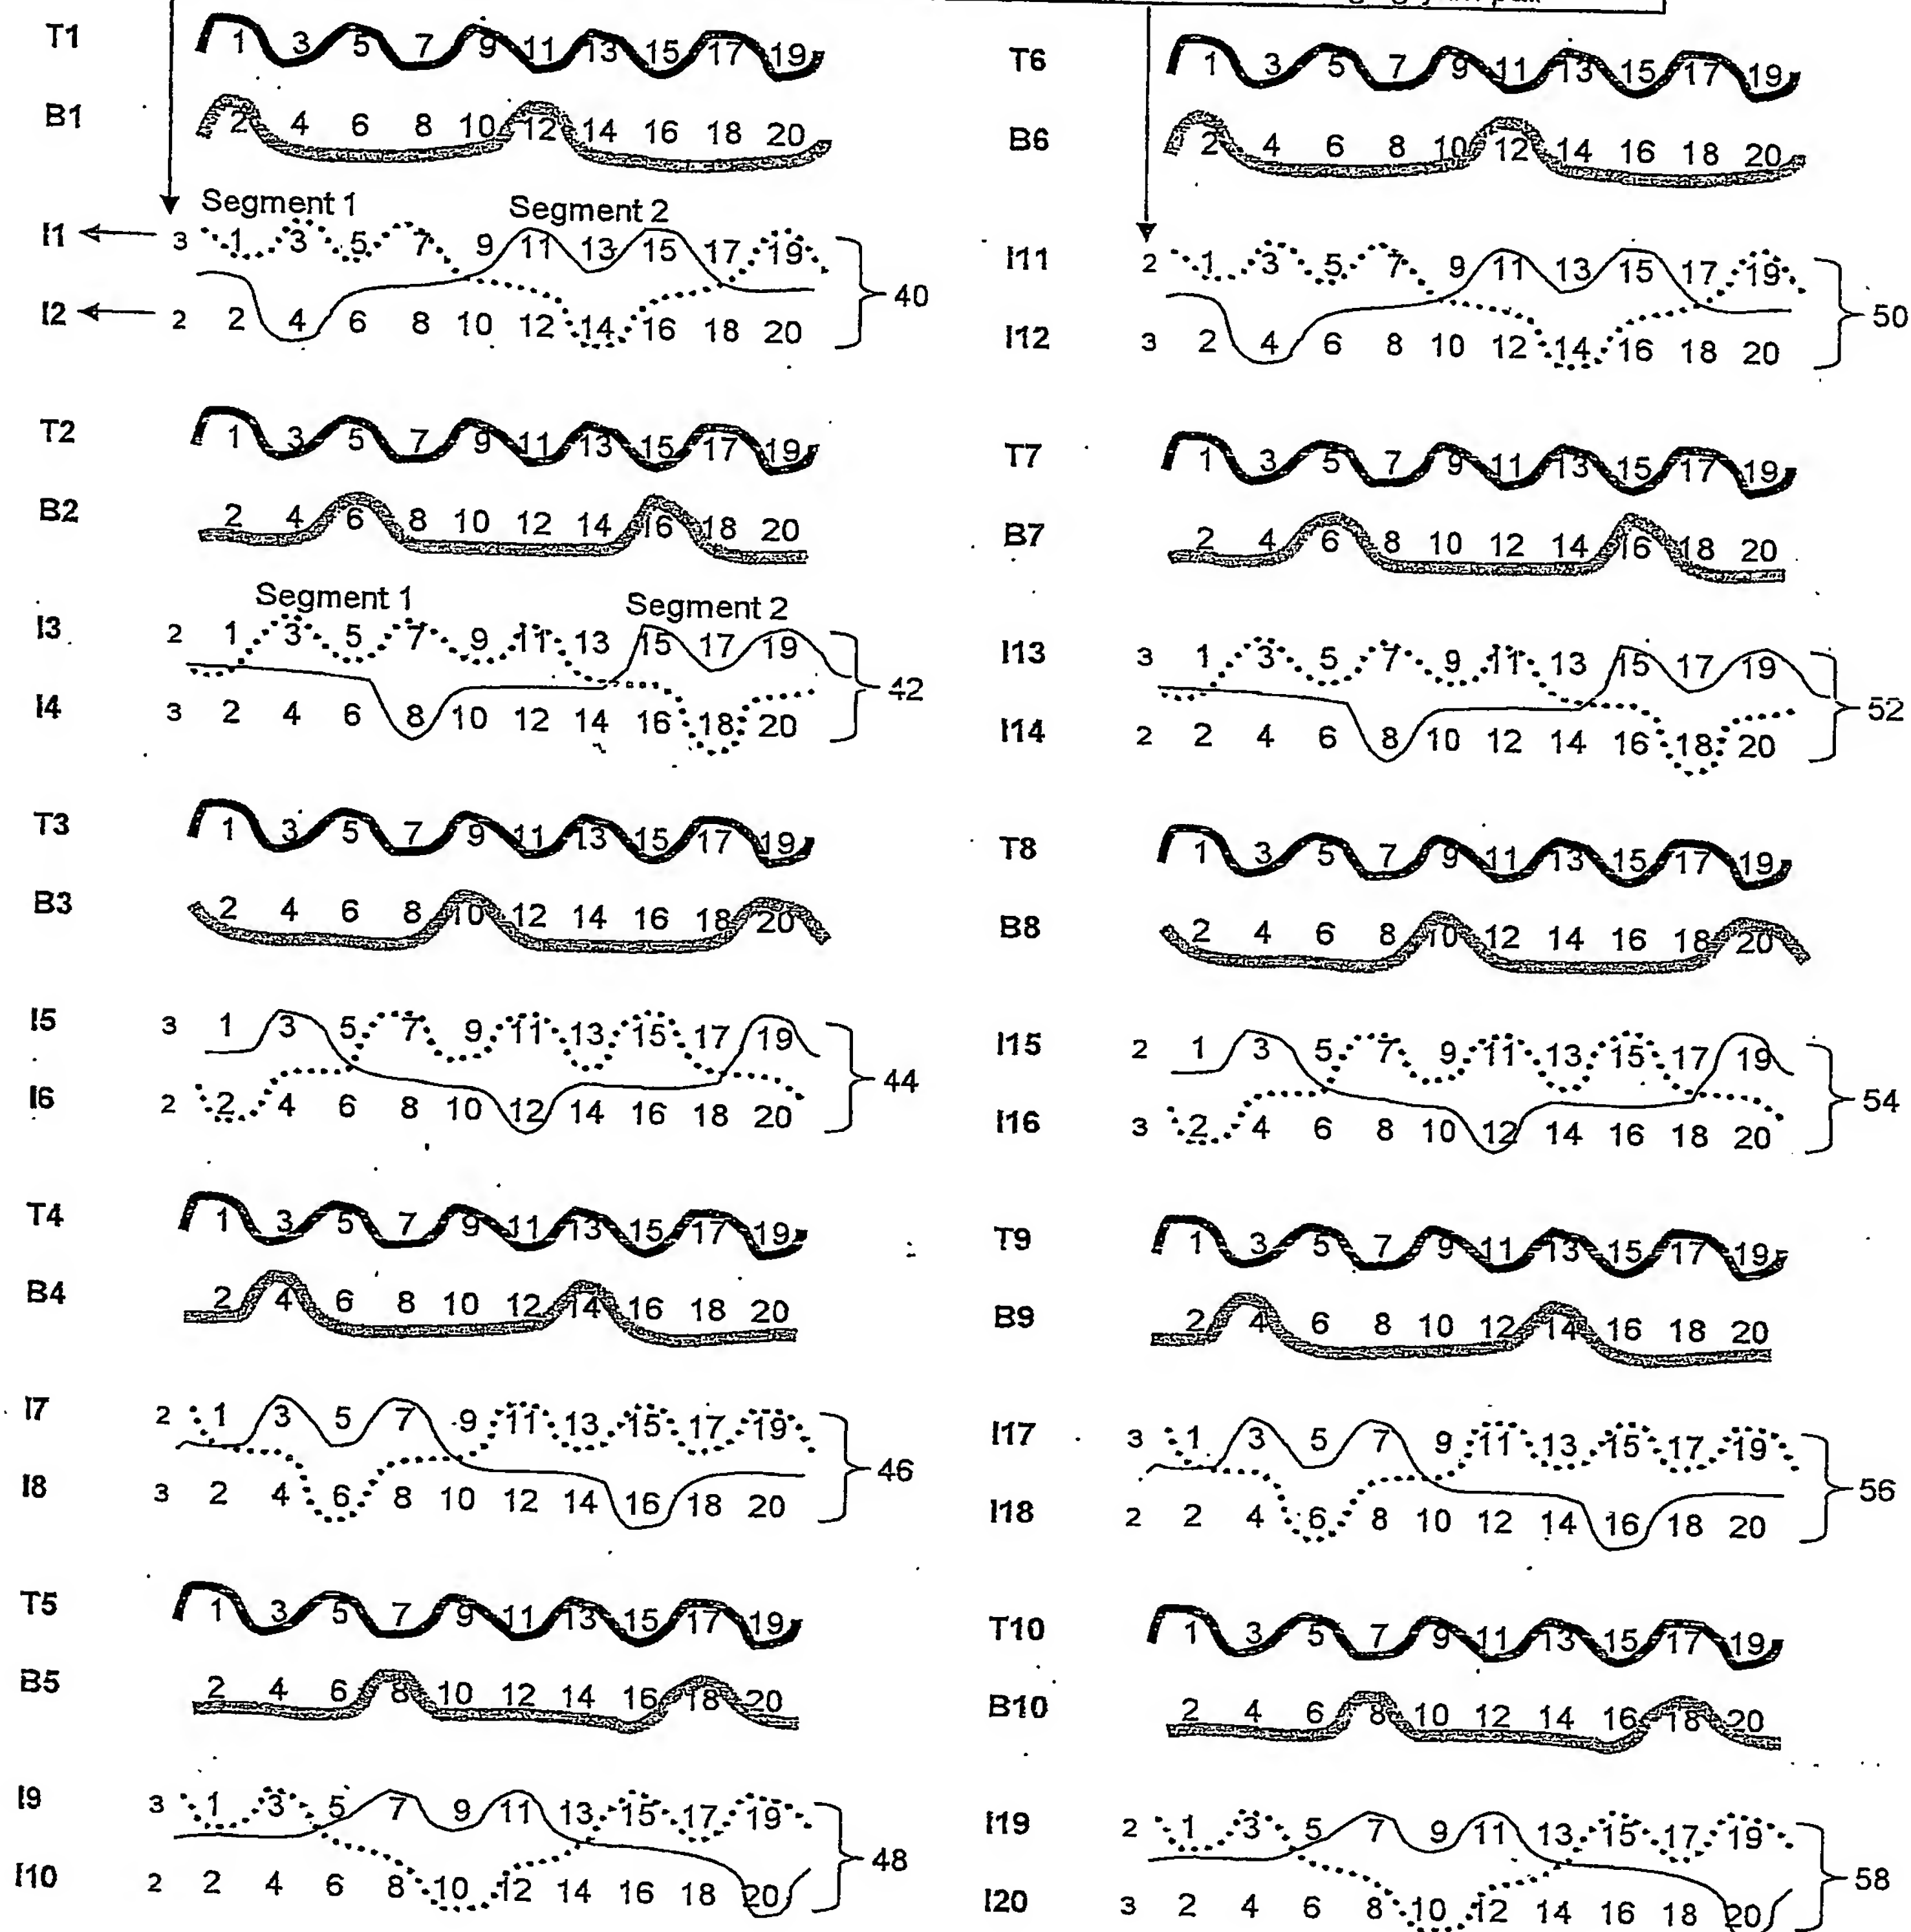


Fig. 1 PRIOR ART

Fig. 1 the prior art

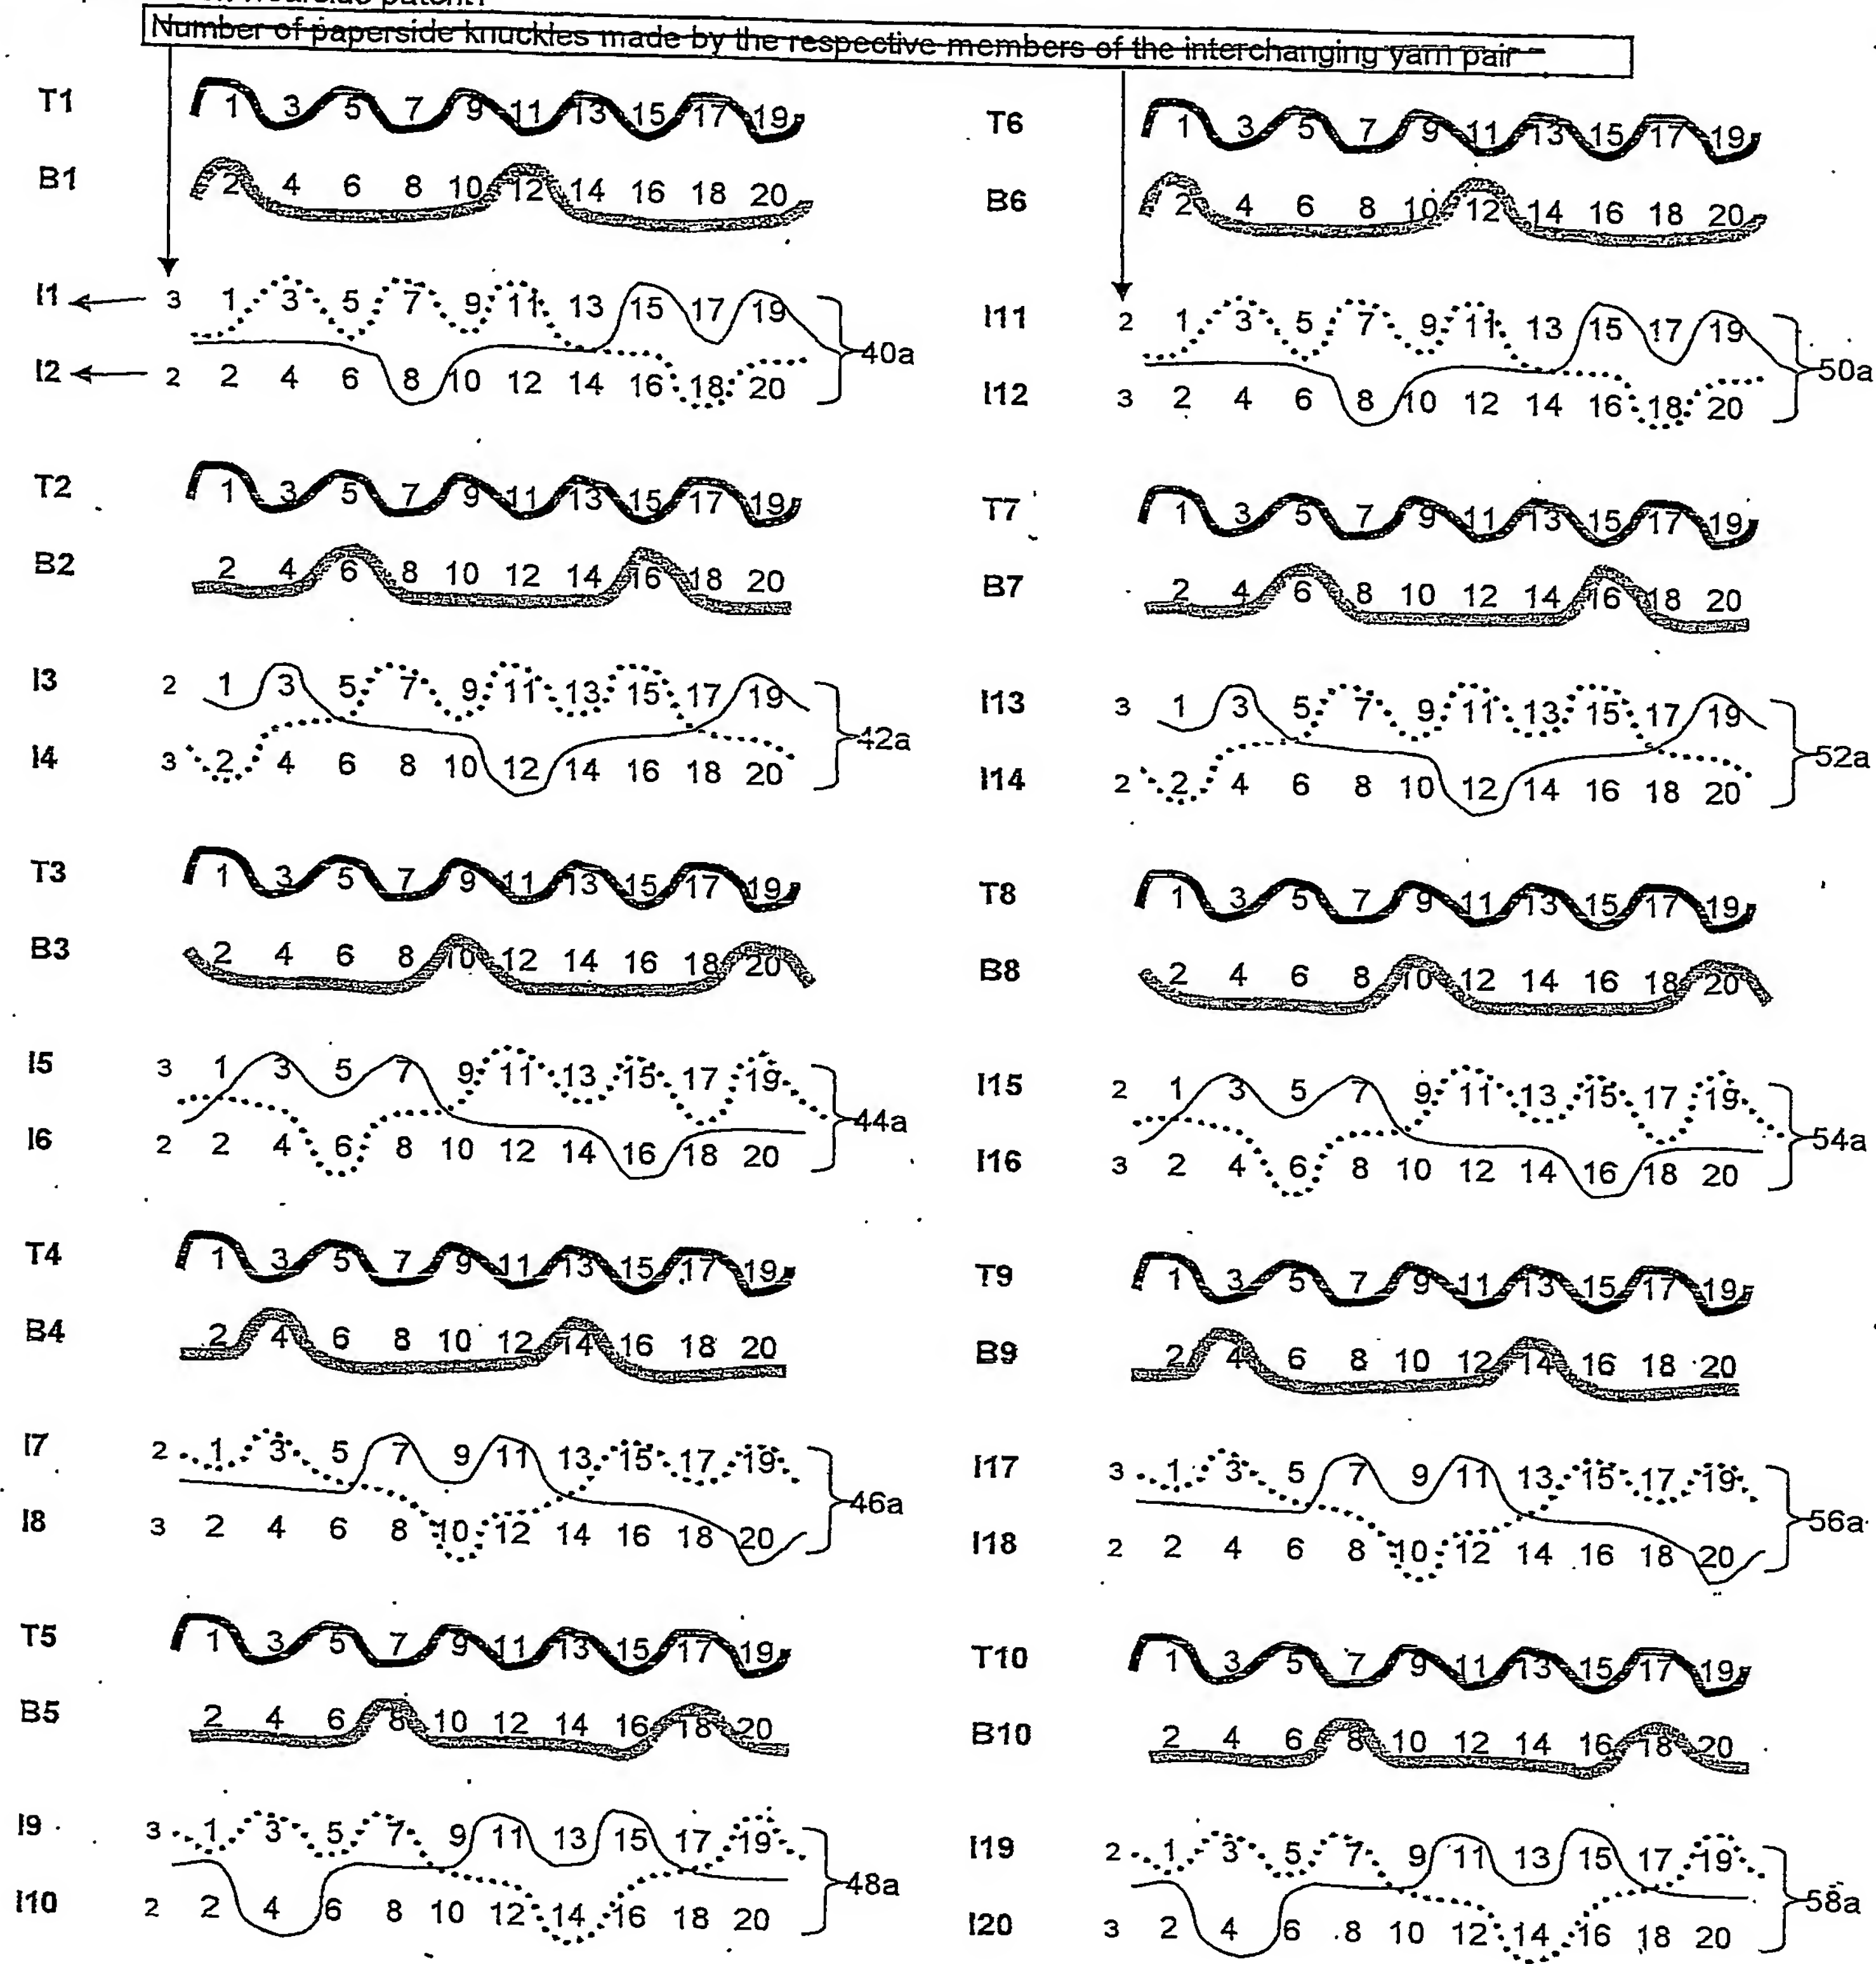


Fig 2 - the invention

Fig. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.